


POLYETHYLENE TERMINAL BLOCKS

SPECIFICATIONS

INSERTS:	BRASS
HOUSING:	POLYETHYLENE (PE)
TEMP.:	80°C
SCREWS:	GALVANISED STEEL
STANDARD:	CE
COLOUR:	NATURAL OR BLACK
FEATURE:	EASY-CUT & LOW-COST ALL SCREWS ARE CAPTIVE & RAISED FOR EASY WIRING

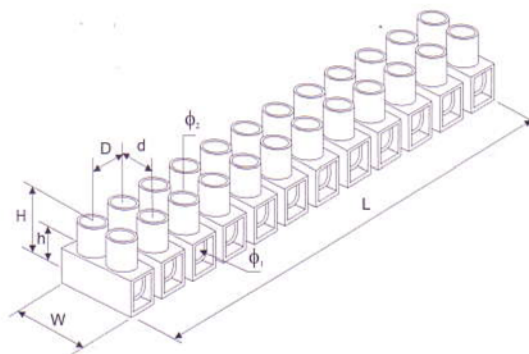

CROSS SECTION	RATED CURRENT	RATED VOLTAGE	DIMENSIONS (mm)						
			L	W	Φ ₁	Φ ₂	D	d	H
4 mm ²	3 - 24A	380V	93	16.8	2.8	2.3	7.8	6	13.6
6 mm ²	5 - 32A	380V	115	18.8	3.3	2.6	10	8	15
10 mm ²	10 - 57A	400V	129	20.7	4.3	2.8	11	9	16.2
12 mm ²	15 - 61A	400V	137	22.5	4.5	2.8	12	10	18.8
16 mm ²	30 - 76A	400V	165	25.5	5.5	3.0	14	11	19.8
25 mm ²	60 - 101A	400V	187	31.2	6.5	3.8	16.5	13	25.5
35 mm ²	80A	400V	226.8	36.1	8.0	4.0	19.2	13.2	29
40 mm ²	100A	450V	254.6	45.0	9.0	3.7	20.5	19.2	34.7

Cross Section: rated for rigid wires and cables (if for flexible wires, it should be reduced one-size, i.e. 6 mm² to 4 mm²)

Φ₁ wire entry hole diameter

Φ₂ fixing hole diameter.