

Anti-Slip Tape


Diamond sand compound with PVC coated rubber

• **Material:**

PVC film with diamond sand compound and natural rubber based adhesive.

• **Features:**

- Self-adhesive slip resistant tape ideal for hazardous areas.
- The abrasive coating provides excellent grip and friction.

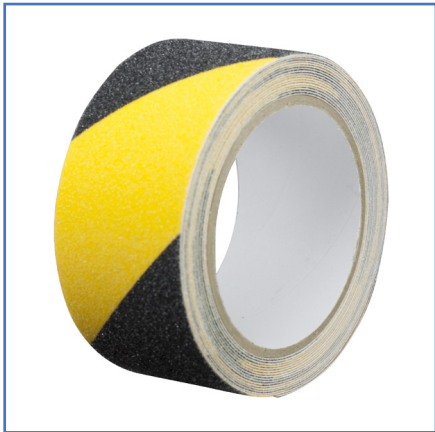

Technical Data

Property	Value
Total Thickness	0.7mm (±0.01)
Adhesive	Rubber based
Tensile Strength	> 20 N/cm
Adhesive to Steel	2 N/cm
Roll Back Tack	> 5 (ball no.)
Temperature Rating	-10°C to +80°C

Item No.	Colour	W (mm)	L (m)	Thickness (mm)
T21	Black & Yellow	50	5	0.7
T70	Black & Yellow	50	10	0.7

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application.
The quoted values are average and should not be taken as maximum or minimum values for specific purposes.
Beal UK cannot be held responsible for product failure unless full testing has been carried out.
The user has to decide on the tapes suitability for their own applications.