

Cable Termination

Cable Butt Connectors

- Materials:**
 - Features:**
 - Max. Voltage:**
- Terminal body: Copper
Plating: Bright electro tin


 - Excellent corrosion resistance and conductivity
 - Bell mouth for easy cable entry
 - Commonly used with cables carrying higher currents
 - Max temperature rating – 105° (without a cable)

1000V



Material

- ① Copper
- ② Bright electro tin

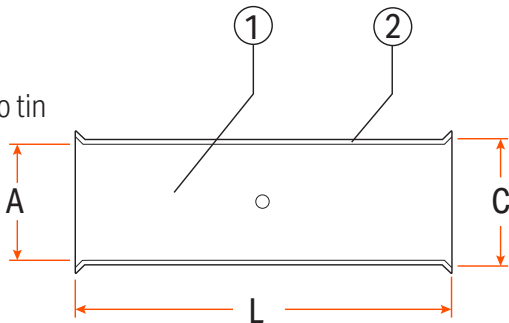

Item No.	Wire Range (mm²)	Dimensions (mm)		
		A	C	L
R6-BUTT	6	3.8	5.5	15
R10- BUTT	10	4.5	6.2	20
R16-BUTT	16	5.4	7.1	20
R25-BUTT	25	6.8	8.8	32
R35-BUTT	35	8.7	11.7	36
R50-BUTT	50	9.5	12.4	40
R70-BUTT	70	11.3	14.7	45
R95-BUTT	95	13.5	17.4	45
R120-BUTT	120	15.0	19.4	45
R150-BUTT	150	16.5	21.2	55
R185-BUTT	185	18.5	23.5	60
R240-BUTT	240	21.0	26.5	80
R300-BUTT	300	23.5	30.0	85
R400-BUTT	400	28.5	36.5	85
R500-BUTT	500	30.0	39.0	100
R630-BUTT	630	35.0	45.0	110

size tolerance ±2%