

Fuses

Micro2 Blade Fuses




- **Application:**
 - **Materials:**
 - **Voltage rating:**
 - **Operating temperature:**
- Designed primarily for the latest vehicles to save space and weight.
Improved characteristics will provide increased protection of cables and devices.

Tin plated zinc alloy.

32V DC max.

-40°C to +105°C.

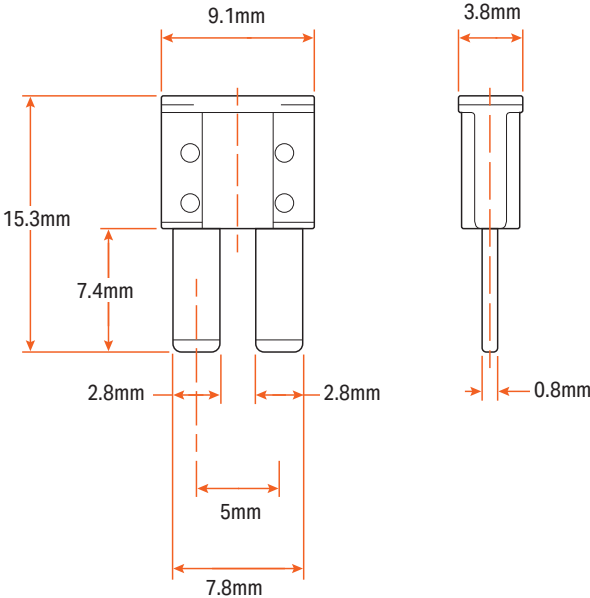

Electrical Characteristics	
Load (% rating)	Opening Time(s) Min / Max
110	14,400 / -
135	0.75 / 120
200	0.15 / 5
350	0.04 / 0.5

Item No.	Colour	Current Rating (A)
FU44-5	Tan	5
FU44-7.5	Brown	7.5
FU44-10	Red	10
FU44-15	Blue	15
FU44-20	Yellow	20
FU44-25	Clear	25
FU44-30	Green	30