


FU48 Circuit Breaker Mini Blade Fuses

Auto-Reset

| | |
|---------------------------------|--|
| • Description: | Single pole thermal type breakers. Can be used in auxiliary and accessory circuits in truck, buses, RVs, marine systems, battery chargers. DC audio systems, engine compartment and bilge area applications. |
| • Material: | Blade: Tin-plated copper alloy terminals Body: UL-Rated 94V0 thermoplastic. |
| • Rating: | 5-30A, 14Vdc |
| • Interrupt Rating: | 150A-450A @ 14 Vdc |
| • Operating Temperature: | -40°C to 85°C |
| • Storage Temperature: | -40°C to 125°C |
| • Termination: | compatible with MINI fusesblocks. |
| • Compliance: | SAEJ553; |
| • Over-load 100%: | No trip within 60 minutes. |
| • Over-load 150%: | Trip within 20 minutes. |
| • Over-load 200%: | Trip within 60 seconds. |

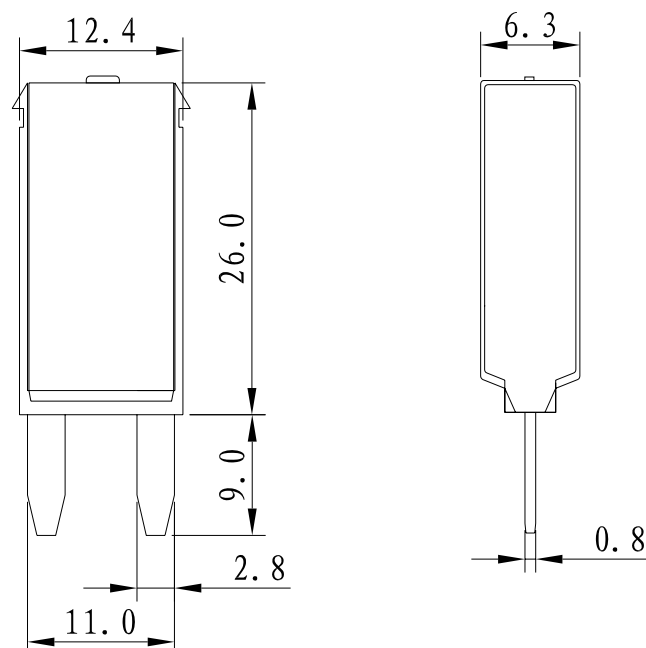

FU48 Circuit Breaker Mini Blade Fuses

Auto-Reset

| Item No. | Colour | Current Rating (A) | Length (mm) |
|----------|------------|--------------------|-------------|
| FU48-5 | Tan | 5 | 34 |
| FU48-6 | Moss Green | 6 | 34 |
| FU48-7.5 | Brown | 7.5 | 34 |
| FU48-10 | Red | 10 | 34 |
| FU48-15 | Blue | 15 | 34 |
| FU48-20 | Yellow | 20 | 34 |
| FU48-25 | White | 25 | 34 |
| FU48-30 | Green | 30 | 34 |

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application.
The quoted values are average and should not be taken as maximum or minimum values for specific purposes.
BEAL UK cannot be held responsible for product failure unless full testing has been carried out.