


Heat Shrink Terminals

Female Bullet Terminals

- Materials:**
 - Shrinkable Temperature:**
 - Operating Temperature:**
 - Features:**
- Conductor: Brass.
Sleeve: Copper tubular.
Insulation: Polyethylene.
Plating: Tin.

+125°C to +180°C.
-45°C to +125°C.

Lined with hot melt adhesive.
Voltage rating: 600V max.
Low insertion force and easy crimping whilst ensuring secure termination.

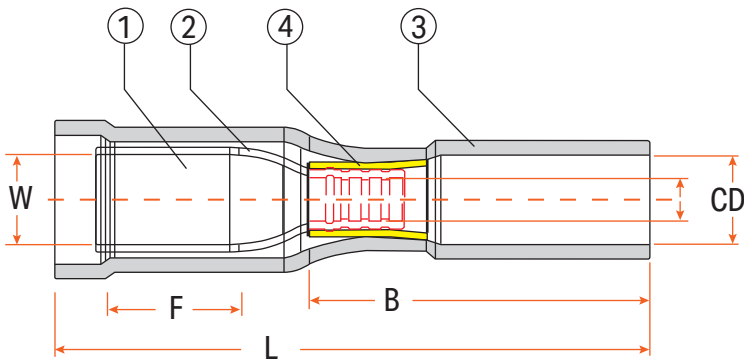

Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)				
			B	C	W	L	F
HWT66	Red	0.5-1.5	18.0	1.7	6.5	30.0	7.3
HWT67	Blue	1.5-2.5	18.0	2.3	6.5	30.0	8.5
HWT68	Yellow	4.0-6.0	18.0	3.4	6.5	31.0	8.5