


# Nylon Push-fit Coupling

## Equal Straight

• <b>Material:</b>	Plastic/Brass Nickel Plated
• <b>Operating Temperature:</b>	0°C to +60°C
• <b>Working Pressure Range:</b>	0-150PSI / 0-9.9Kgf/cm <sup>2</sup> (0-990KPa)
• <b>Max. Working Pressure:</b>	10 bar
• <b>Negative Pressure:</b>	-29.5in Hg / -750mmHg (-750Torr)
• <b>Features:</b>	<ul style="list-style-type: none"> <li>• For air/vacuum only.</li> <li>• One-touch push-to-connect configuration allows an instant tubing connection.</li> <li>• All fittings are useful for piping in confined spaces, given its six-angle wrench processing inside.</li> <li>• Immediate strong engineering plastic (POM) sleeve disconnection by pressing the sleeve and then simply removing the tube from the fitting.</li> <li>• Fittings are equipped with Teflon-treatment already or o-ring on the thread.</li> <li>• Nickel-plated brass body ensures anti-contamination properties for an extended product life.</li> </ul>

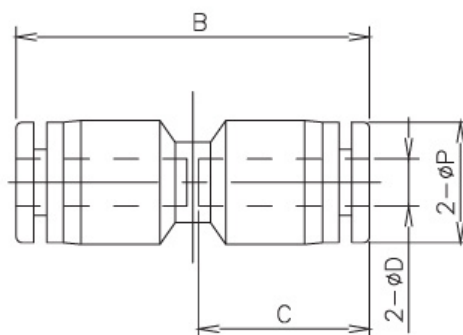

Item No.	Colour	Inner diameter (mm) D	Outer diameter (mm) P	Length (mm) B	Tube length (mm) C
TC30	Black	4	11.0	31.3	14.5
TC32	Black	6	13.2	34.2	15.6
TC33	Black	8	14.8	39.5	18.0
TC34	Black	10	18.3	41.9	19.3
TC35	Black	12	20.4	46.2	21.0