


# Fuses

## PAL Fuse (Female)

- **Application:**

Designed primarily for automobiles  
Female connector
- **Material:**

Copper

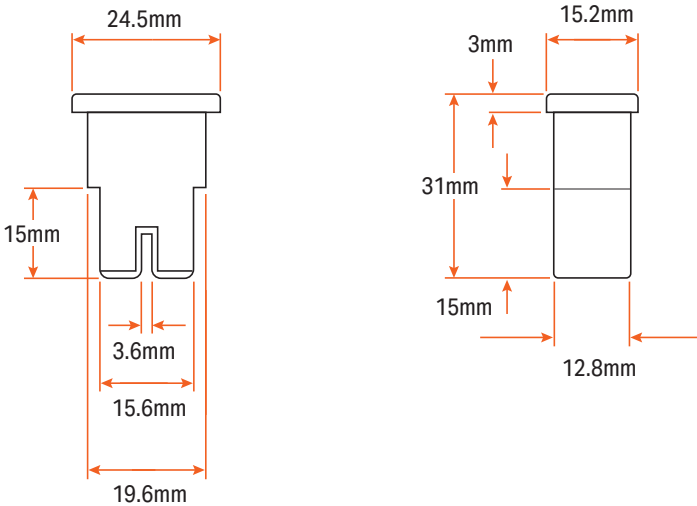

Electrical Characteristics	
Load (% rating)	Opening Time(s) Min / Max
100	14,400 / -
200	- / 10
350	- / 0.5

Item No. (A)	Colour	Current Rating
FU16-20	White	20
FU16-30	Pink	30
FU16-40	Green	40
FU16-50	Red	50
FU16-60	Yellow	60
FU16-80	Black	80
FU16-100	Blue	100

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application.  
The quoted values are average and should not be taken as maximum or minimum values for specific purposes.  
BEAL UK cannot be held responsible for product failure unless full testing has been carried out.  
The user has to decide on the tapes suitability for their own applications.