

Screw Mounted Bases

- **Material:**
- **Application:**
- **Operating Temperature:**


UL approved Nylon 66, 94V-2.

Saddle design provides maximum stability to wire bundles.


40°C to +85°C.



CA3/CA4

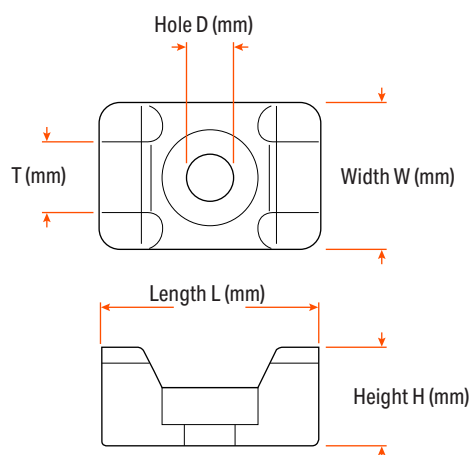

CA5

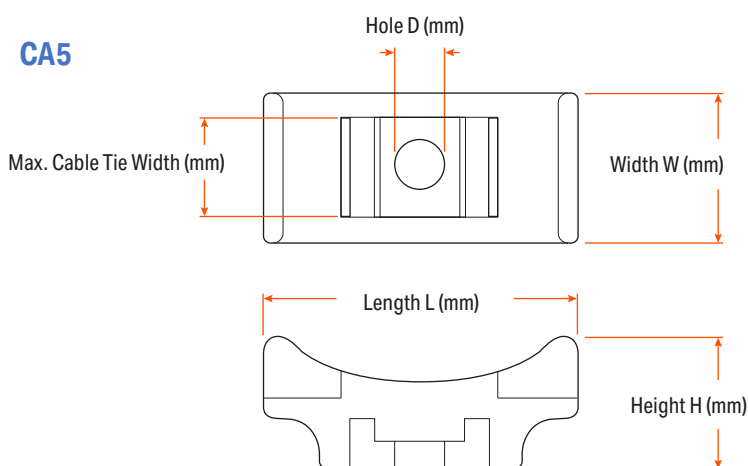

Item No.	Colour	Width W (mm)	Length L (mm)	Suitable for Maximum Cable Tie Width (mm)	Height H (mm)	Hole D (mm)
CA3-B	Black	12.7	17.8	5.0	8.2	4
CA4-B	Black	15.9	21.9	9.5	9.7	5
CA5	Black	18.0	40	12.7	16.0	6
CA3-W	Natural	12.7	17.8	5.0	8.2	4
CA4-W	Natural	15.9	21.9	9.5	9.7	5