

Fuses

Standard Blade Fuses

• Application:

Designed primarily for vehicles.
 Perfect for use in a wide range of low voltage, automotive and electronic applications.
 Ideal for use in a wide range of low voltage, automotive and electronic applications.
 Colour coded for amperage identification. Quick and easy to replace.


• Materials:

Tin plated zinc alloy.

• Standards:

ISO8820-3 (GB/T 31465.3-2015)

• Voltage rating:


32V DC max

• Operating temperature:

-40°C to +105°C


Electrical Characteristics

Load (% rating)	Opening Time(s) Min / Max
110	14,400 / -
135	0.75 / 1800
200	0.15 / 5
350	0.08 / 0.5

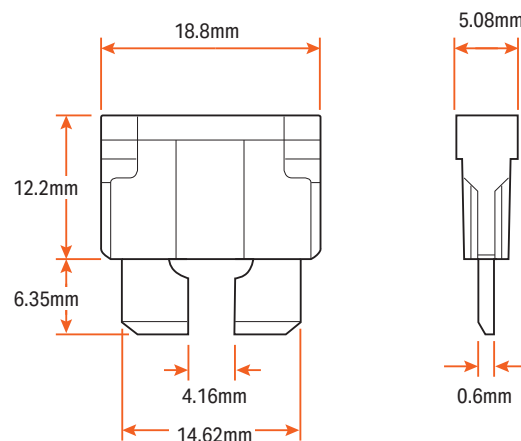

Item SKU	Colour	Current Rating
FU2-1	Black	1
FU2-2	Grey	2
FU2-3	Purple	3
FU2-4	Pink	4
FU2-5	Tan	5
FU2-7.5	Brown	7.5
FU2-10	Red	10
FU2-15	Blue	15
FU2-20	Yellow	20
FU2-25	Clear	25
FU2-30	Green	30
FU2-40	Orange	40