



Fuses Midi Fuses

		12 A S	2 C
•	App	lica	tion:
	P P		

• Material:


Voltage:


Designed for high current circuit protection (up to 150A

ROHS COMPLIANT

Blade: Zinc Casing: PBT (polybutylene terephthalate).

32V



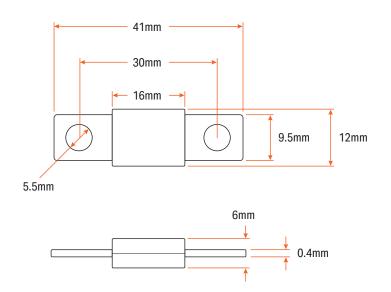

Item No.	Colour	Current Rating (A)	Length (mm)
FU20-30	Orange	30	41.0
FU20-40	Green	40	41.0
FU20-50	Red	50	41.0
FU20-60	Yellow	60	41.0
FU20-70	Brown	70	41.0
FU20-80	White	80	41.0
FU20-100	Blue	100	41.0
FU20-125	Pink	125	41.0
FU20-150	Black	150	41.0

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes.

The quoted values are average and should not be taken as maximum or minimum values for specific purp BEAL UK cannot be held responsible for product failure unless full testing has been carried out.

The user has to decide on the tapes suitability for their own applications.