


# Clear Braided Tubing

- **Material:** RPVC
- **Operating Temperature:** -15°C to +65°C
- **Features:**
  - Great for water supply and draining, or transferring various fluids or powders, can be use with gas, oil etc.
  - Excellent abrasion resistance.
  - High resistance to alkalis/acids.
  - Silicone and cadmium free.
  - Comply with BS6066 and ISO5774.
  - Food grade.
  - Durable, Anti-Cold Proof, Non-inflated.
  - High-flexibility, Light-Weight and easy to handle.
  - No fissure phenomenon by UV rays/sun light.
  - Little expansion/contraction.
  - Low toxicity.

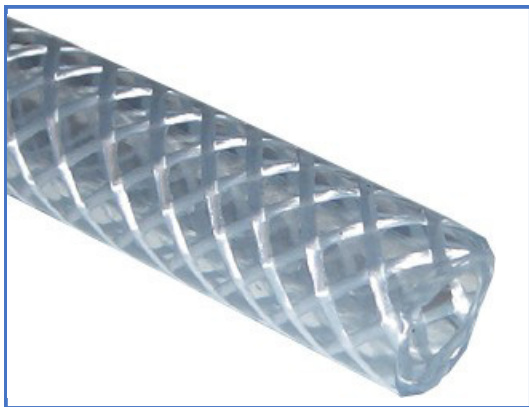

Item No.	Colour	Nominal Dimension (In)	Size I.D. x O.D. (mm)	Max. working pressure (bar)	Burst pressure (bar)	Bend radius (mm)	Weight kg/roll
TH16	Clear	3/16	5 x 10	13	50	20	2.10
TH17	Clear	1/4	6 x 11	15	65	25	2.30
TH18	Clear	5/16	8 x 13	15	58	33	2.70
TH19	Clear	3/8	10 x 15	12	45	40	3.20
TH20	Clear	1/2	13 x 18	12	40	52	4.00
TH55	Clear	3/4	19 x 25	10	32	76	7.10
TH56	Clear	1	25 x 31	9	28	100	8.9

Given working pressure is based on an ambient temperature of 20°C. Due to natural properties of PVC as the ambient temperature increases the pressure the hose will withstand decreases at an average rate of 15% per increase of 10°C, and in similar increments thereafter.