

Ordering Information : FU37

Amp	Cover Color
5	LT BROWN
6	BLACK
7.5	BROWN
8	BROWN
10	RED
15	BLUE
20	YELLOW
25	WHITE
30	GREEN

Electrical :

% of Ampere Rating	Ampere Rating	Opening Rating
100%	5-30A	No Trip
135%	5-30A	30Minutes, Max
200%	5-30A	60Seconds, Max

Description :

Miniaturized single pole automatic reset thermal circuit breaker designed. For automotive fuse block installation. Extends the benefits of circuit breaker performance and Convenience to application which are cost critical. SAE Type 1 (Automatic reset) according to SAE standard J553.

Typical Applications :

Extra low voltage wiring systems on all types of vehicles and marine craft. Cover is color-coded to amperage ratings.

Specification :


- ※ Voltage Rating : DC 14V and less.
- ※ Ampere Rating : 5A, 6A, 7.5A, 8A, 10A, 15A, 20A, 25A, 30A
- ※ Standards : SAE J553 Type 1.
- ※ Operating Temperature Rating : -40°C to +85°C
- ※ Materials : Flame Retardant Body and Tin Plated Brass flat.

CIRCUIT-BREAKER FOR EQUIPMENT SPECIFICATIONS

TRIP TIME (AMB. TEMP 25°C ± 3 DEGREES CENTIGRADE)

MODEL	iATY	eATY	
CURRENT RATING:	5A,6A, 7.5A, 8A, 10A,15A,20A, 25A, 30A		
	OVERLOAD PERCENTAGE		
100%	135%	200%	300%
No Trip	Trip in 30min	5-35 sec	1-9 sec

CALIBRATION

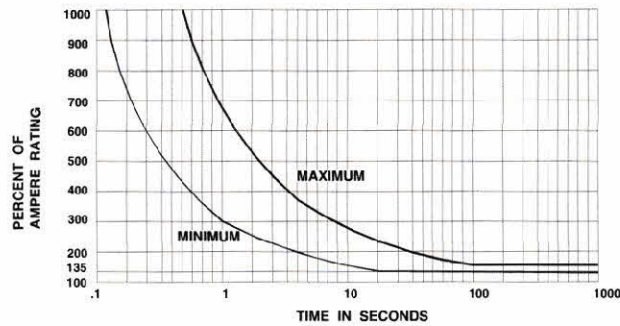

AMBIENT COMPENSATION CHART

